

Culligan. quench

578-C

Vivreau® Vi Tap



- Cold, ambient, and hot filtered water
- Chilled sparkling and semi-sparkling water
- Touch-control tap dispensing
- Dry block cooling technology for quick recovery
- Hot water safety features
- Available without hot water as 573-C





Product Details

Modernize your countertops with the 578-C Vivreau® C-Tap. This stylish and contemporary chrome-finished countertop dispenser offers hot water instantly as well as a virtually endless supply of cold, filtered sparkling and still water via a digital touchpad. The 578-C is a perfect solution for a VIP lounge, staff pantry or kitchen, breakroom or high-end hospitality environment. Also available without hot water as the 573-C.


Vivreau® C-Tap

- Cold, ambient, and hot filtered water
- Chilled sparkling and semi-sparkling water
- Dry block cooling technology for quick recovery
- Touch-control tap dispensing with hot water safety feature
- Zero-splash water flow
- Dispensing height of 33 cm/13"
- Stainless steel drip tray with drain
- Requires under-counter space and access
- Available without hot water as Quench 573-C

Culligan Quench products are certified by independent authorized 3rd party laboratories in accordance of appropriate industry standards. To find out more about which certification your product may have, please contact us.

All sparkling water dispensers require CO2 cylinders. If connecting to a bulk or existing CO2 system, a CO2 line terminating at a ¼" barbed shutoff valve must be available at the installation site.

Specifications

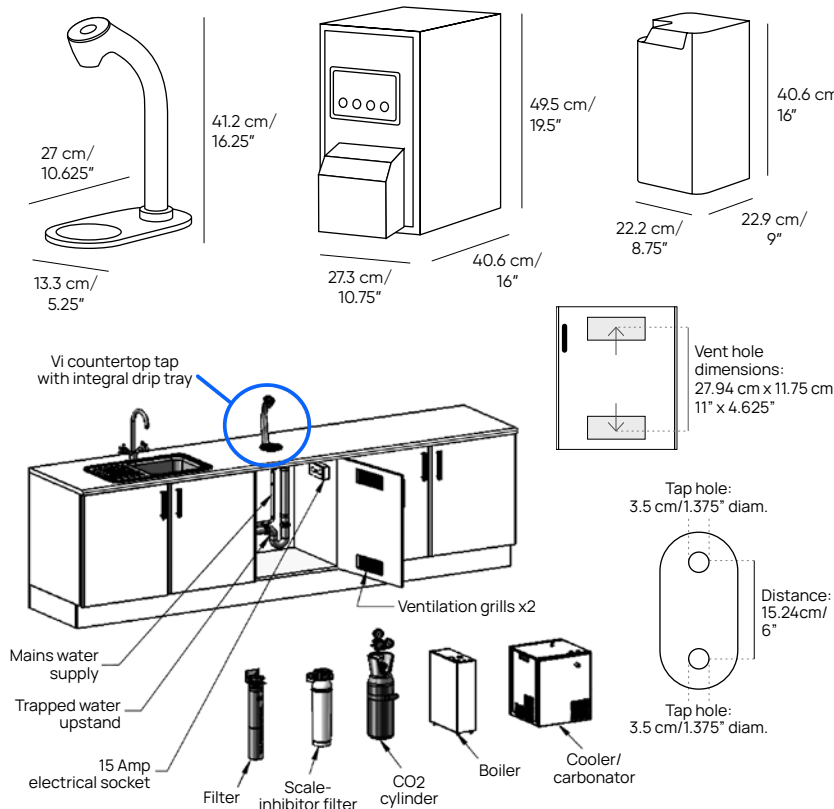

578-C

Dimensions

| | |
|------------------------------|---|
| Cabinet Space Requirements | 76.2 cm h x 76.2 cm w x 60.96 cm d / 30" h x 30" w x 24" d |
| Boiler | 40.6 cm h x 22.2 cm w x 22.9 cm d / 16" h x 8.75" w x 9" d |
| Cooler/Carbonator | 49.5 cm h x 27.3 cm w x 40.6 cm d / 19.5" h x 10.75" w x 16" d |
| Tap Dispenser | 41.3 cm h x 13.3 cm w x 27 cm d / 16.25" h x 5.25" w x 10.625" d (allow 15.2 cm / 6" clearance above) |
| Dispensing Area | 33 cm / 13" |
| Water Options | Cold still, ambient still, hot still, cold sparkling, cold semi-sparkling |
| Continuous Cold Water Supply | 22 gal/h (85 L/hr) |
| Hot Water Production | 3.2 gal/h (12 L/hr) |
| Cooling Technology | Aluminum block cooling technology |
| Recommended Water Pressure | 50 - 80 psi |
| Rated Voltage/Frequency | (2) 120v/60 Hz |
| Power Consumption | 11 amps |
| Model Number | 578-C |

573-C

Dimensions

| | |
|------------------------------|--|
| Cabinet Space Requirements | 76.2 cm h x 60.96 cm w x 60.96 cm d / 29.5" h x 24" w x 24" d |
| Cooler/Carbonator | 49.5 cm h x 27.3 cm w x 40.6 cm d / 19.5" h x 10.75" w x 16" d |
| Tap Dispenser | 41.2 cm h x 13.3 cm w x 27 cm d / 16.24" h x 5.25" w x 10.625" d |
| Dispensing Area | 33 cm / 13" |
| Water Options | Cold still, ambient still, cold sparkling, cold semi-sparkling |
| Continuous Cold Water Supply | 22 gal/h (85 L/h) |
| Hot Water Production | None |
| Cooling Technology | Aluminum block cooling technology |
| Recommended Water Pressure | 50 - 80 psi |
| Rated Voltage/Frequency | 120v/60 Hz |
| Power Consumption | 11 amps |
| Model Number | 573-C |